


IG-16GM

02&03 TYPE



REDUCTION RATIO	L	REDUCTION RATIO	L
1/4 ~ 1/5	15.05	1/198 ~ 1/850	26.00
1/14 ~ 1/29	18.70	1/867 ~ 1/4592	29.65
1/58 ~ 1/157	22.35		

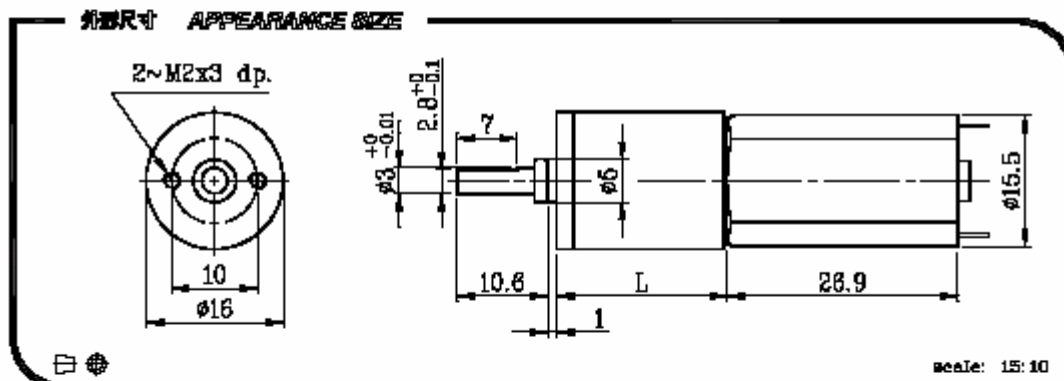

GEARED MOTOR TORQUE/SPEED

減速比 Reduction ratio	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
	4	14	19	29	62	72	84	104	128	157	231	316	370	455	561	690	1014	1621	1996	3027
6V 定格扭力 (g-cm) Rated torque	31	90	120	190	340	400	470	580	710	870	1000	1400	1700	2000	2400	3000	3000	3000	3000	3000
6V 定格回轉數 (rpm) Rated speed	140	435	320	210	100	85	73	59	48	39	26	19	16	13	11	8.6	5.8	4.1	3.5	2.3
9V 定格扭力 (g-cm) Rated torque	30	85	115	180	320	380	440	550	670	820	950	1300	1600	1900	2200	3000	3000	3000	3000	3000
9V 定格回轉數 (rpm) Rated speed	1400	435	320	210	100	85	73	59	48	39	26	19	16	13	11	8.6	5.8	4.1	3.5	2.3

訂購時，請告知"減速比"及"電壓"即可，例如 **IG-16GM-12V-1/62**

全系列：NT650 (未稅)

訂購低於 3pcs，運費 NT100 另計